



Lubrication Positions




Beta 40-SSS

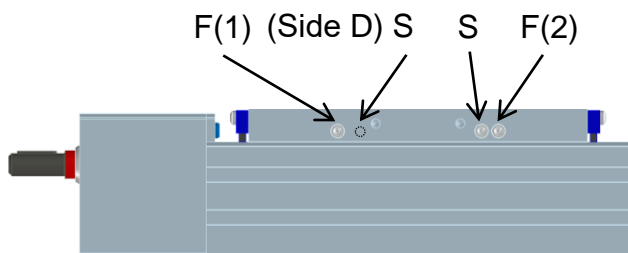

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side. .


Beta 40-SGS

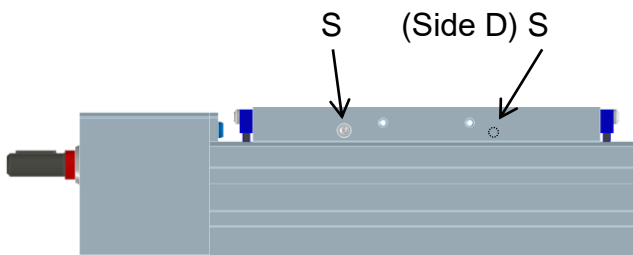

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.


Beta 50-C-SRS

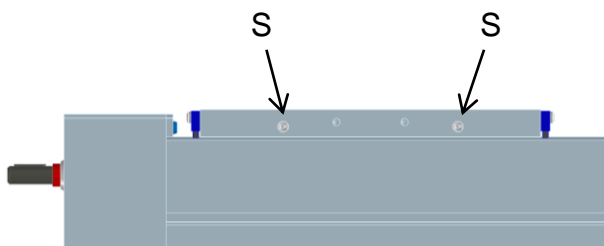

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through two of the four funnel grease nipples on either side.


Beta 60-SSS

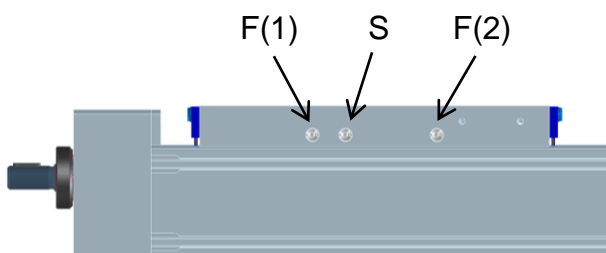

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 60-SGV

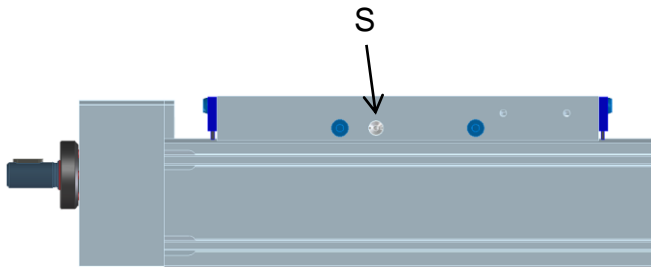

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 70-C-SSS

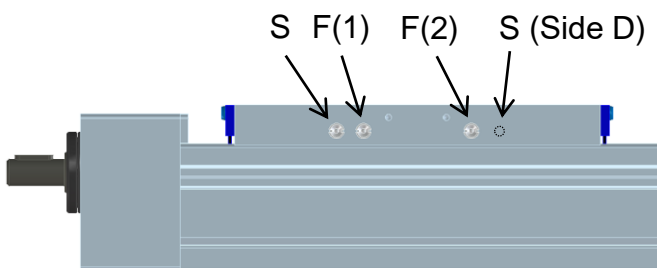


Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 70-C-SRS

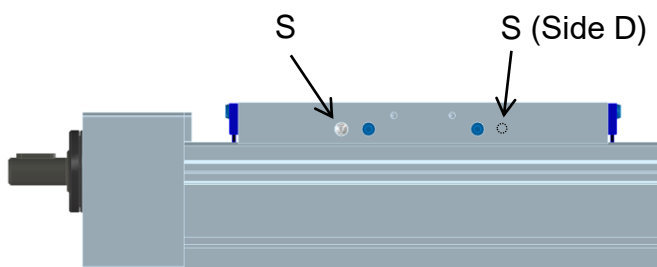

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 80-SSS

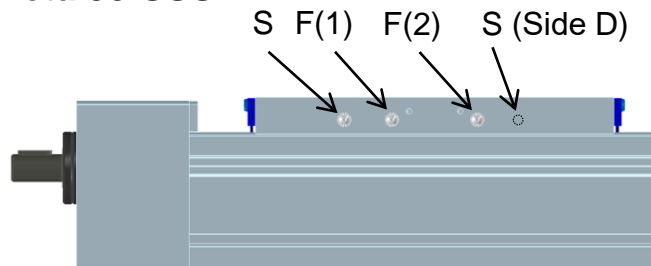


Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.

Beta 80-SRS

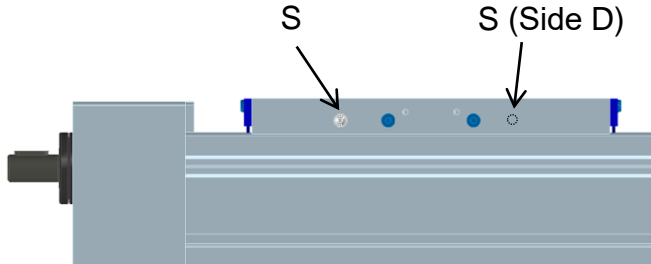


Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Lubrication Points for Beta Linear Units with Spindle Drive


Beta 80-SGV

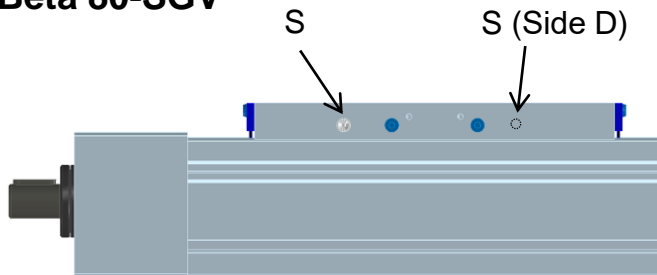

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.


Beta 100-D-SSS

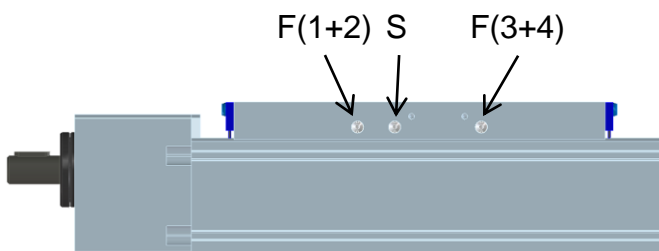

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1+2 and 3+4 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 110-SSS

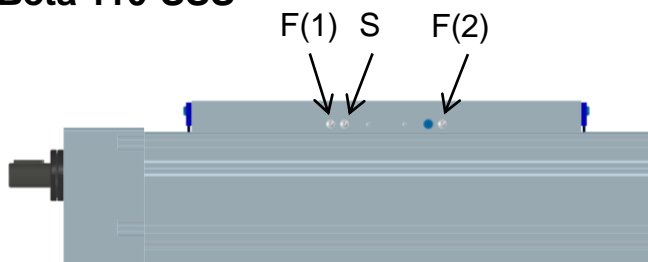

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 110-SRS

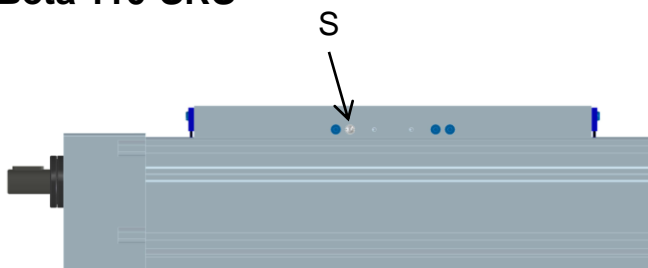

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 100-C-SGV

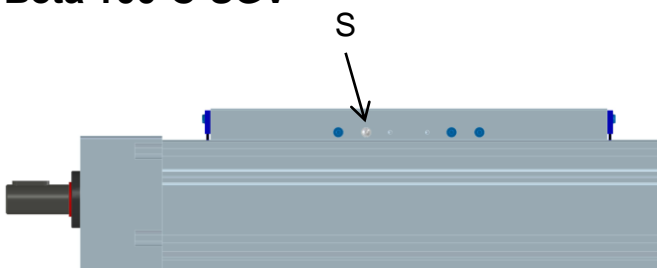


Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Lubrication Points for Beta Linear Units with Spindle Drive


Beta 120-C-SSS

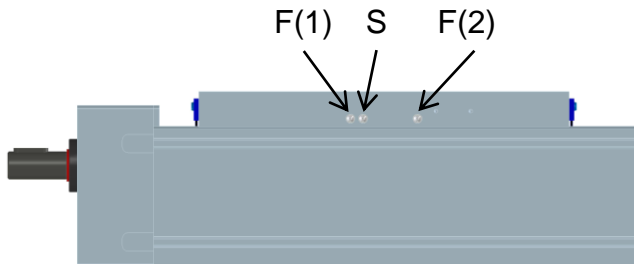

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 140-SSS

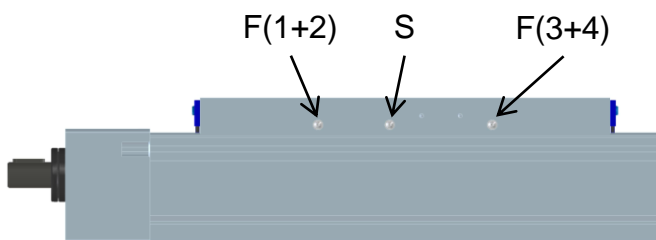

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1+2 and 3+4 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 140-C-SSS

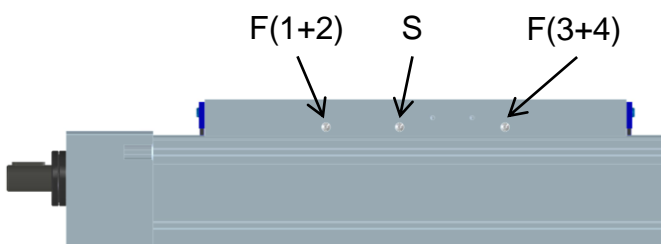

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1+2 and 3+4 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 165-SSS

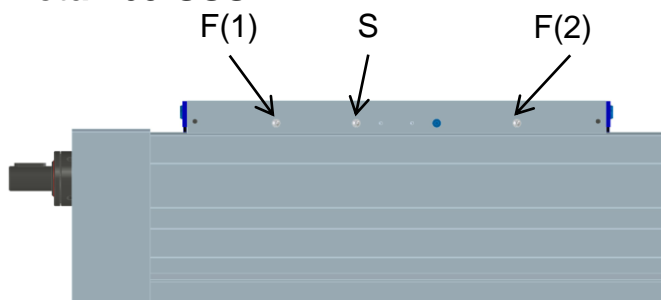

Lubrication of spindle drive (**S**).
Lubrication of guiding carriages 1 and 2 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.


Beta 165-SGV

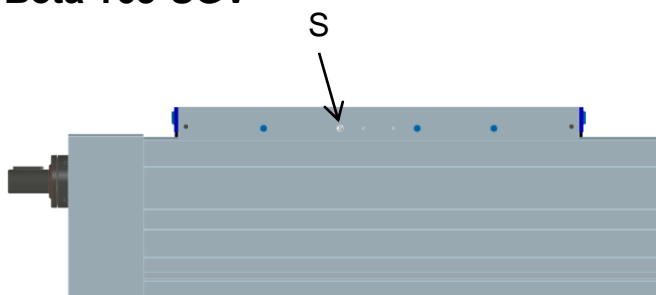

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.


Beta 165-C-SGV

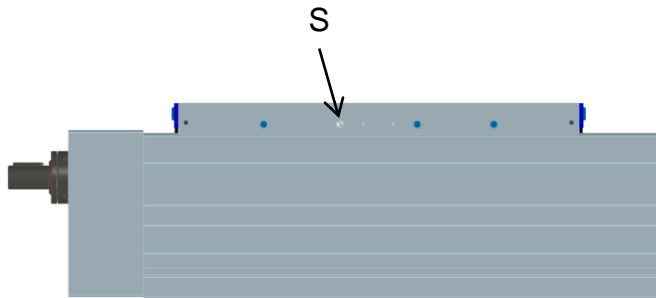

Lubrication of spindle drive (**S**).

The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 165-C-SSF (BR)

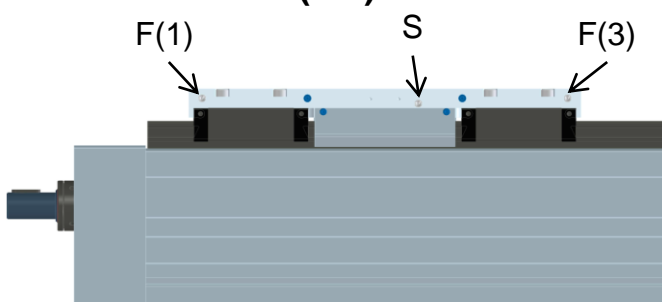


Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1, 2, 3 and 4 (**F**).

Guiding carriages 1 and 3 must be lubricated individually through both funnel grease nipples on side C, guiding carriages 2 and 4 through both funnel grease nipples on side D. The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 165-C-SSF (THK)

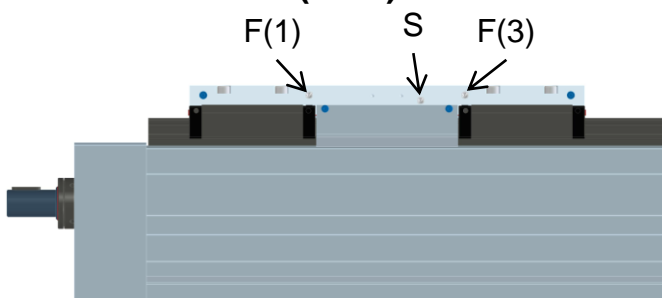


Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1, 2, 3 and 4 (**F**).

Guiding carriages 1 and 3 must be lubricated individually through both funnel grease nipples on side C, guiding carriages 2 and 4 through both funnel grease nipples on side D. The spindle drive must be lubricated through the funnel grease nipple on either side.

Beta 180-SSS

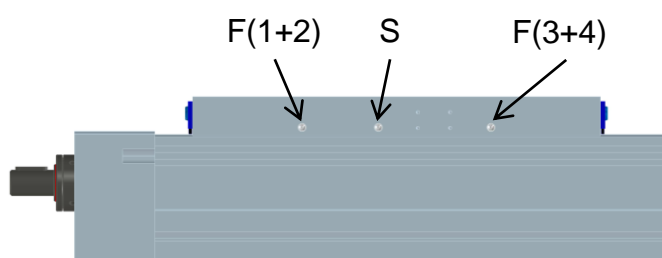


Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1+2 and 3+4 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.

Beta 180-C-SSS

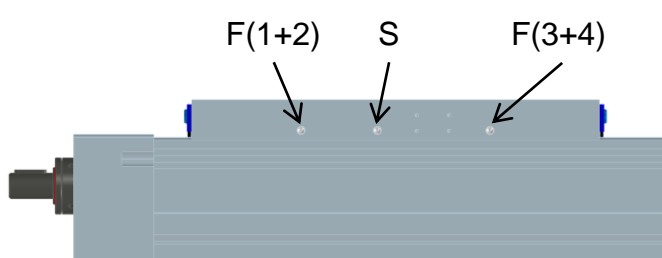

Lubrication of spindle drive (**S**).

Lubrication of guiding carriages 1+2 and 3+4 (**F**).

The spindle drive and guiding carriages must be lubricated through all three funnel grease nipples on either side.